


S20T

一体型 3°

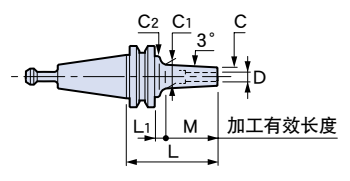

■注意事项  
●刀具安装…插入刀具时,请务必将刀具插入比安全记号更深的位置。

安全记号  
壁厚 t  
最短夹持长度 H  
刀具最大插入长度 h

SUGINO  
V9/NSV9/H5/H7/H9

HEATROBO电磁 1200S (HRD-01S-230AS)  
电磁式加热器对应表  
[○] 可加热 [×] 不可加热

型号	φD	φC	t	L	M	L <sub>1</sub>	φC <sub>1</sub>	φC <sub>2</sub>	H	h	Kg	N	S	缩略图
S20TR2-SLSA 3-40 -60	3	6	1.5	40	22	5.5	8.3	20	9	46	0.1	0.4	4.6	○
				60	42		10.4			66				
S20TR2-SLSA3.175-40 -60	3.175	6.175	1.5	40	22	5.5	8.5	20	9	46	0.1	0.4	4.4	○
				60	42		10.6			66				
S20TR2-SLSA 4-40 -60	4	7	1.5	40	22	5.5	9.3	20	12	46	0.1	0.4	3.6	○
				60	42		11.4			66				
S20TR2-SLSA 5-40 -60	5	8	1.5	40	22	5.5	10.3	20	15	46	0.1	0.4	2.8	○
				60	42		12.4			66				
S20TR2-SLSA 6-60 -SLRA 6-35	6	9	1.5	60	42	5.5	13.4	20	18	66	0.1	0.5	4.7	○
		12	3	35	19.6		2.9			14.1		—	46	
S20TR2-SLRA 8-35	8	14	3	35	19.6	2.9	16.1	—	20	51	0.1	0.4	0.9	×
S20TR2-SLRA10-35	10	16	3	35	19.6	2.9	18.1	—	20	51	0.1	0.5	0.8	×
S20TR2-SLRA12-45	12	20	4	45	32.5	—	23.4	—	30	51	0.2	0.6	0.8	×

S = 1 : 4

**S20TR2-SLSA3-40**

No.1  
4.6

**S20TR2-SLSA3-60**

No.2  
9.2

**S20TR2-SLSA3.175-40**

No.3  
4.4

**S20TR2-SLSA3.175-60**

No.4  
8.8

**S20TR2-SLSA4-40**

No.5  
3.6

**S20TR2-SLSA4-60**

No.6  
7.2

**S20TR2-SLSA5-40**

No.7  
2.8

**S20TR2-SLSA5-60**

No.8  
5.8

**S20TR2-SLSA6-60**

No.9  
4.7

**S20TR2-SLRA6-35**

No.10  
1.1

**S20TR2-SLRA8-35**

No.11  
0.9

**S20TR2-SLRA10-35**

No.12  
0.8

**S20TR2-SLRA12-45**

No.13  
0.8

思诚资源  
www.sczy.com  
高端制造服务商

深圳思诚资源科技有限公司  
SHENZHEN SCZY TECHNOLOGY CO.,LTD.

电话/Tel: 0769-22186189  
网址/Web: www.sczy.com  
邮箱/E-mail: sales@sczy.com



微信公众平台

地址/Adr: 广东省东莞市长安镇长青南路1号万科中心1906

